

# Salotech International B.V.

Member of DERC Beheer B.V.

## Foot Valves FG Series

Bypass or dry shut, up to 2800 Bar



- Reliable ●
- Rugged but easy to operate ●
- Easy to repair ●


### 60 Second Cartridge Overhaul

#### Step 1



Remove dump adapter

#### Step 2

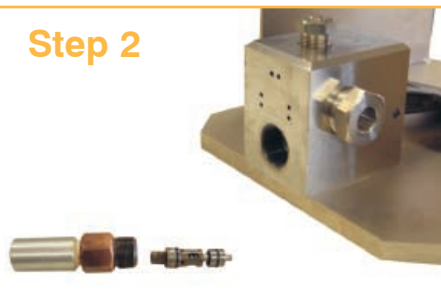

Align lobe on cartridge assembly with groove in cartridge holder and Turn counter clockwise to unlock and remove.

#### Step 3



Replace cartridge and install in block

FG Footvalves rev-001n



# Salotech International B.V.

Member of DERC Beheer B.V.

The FG series foot operated control guns features a fully enclosed safety guard and increased foot pedal area to both minimize fatigue and ensure a positive valve operation. All FG series foot operated control guns use a "quick change" cartridge type valve, which can be replaced in less than a minute. The assembly is mounted on a heavy-duty nickel-plated base, with solid foot guard.

The foot operated control guns are also available with electric on/off switch to suit every type of high-pressure water jetting unit.

The valves are also available with pneumatic air actuators to use them in a high-pressure system as an on/off valve.

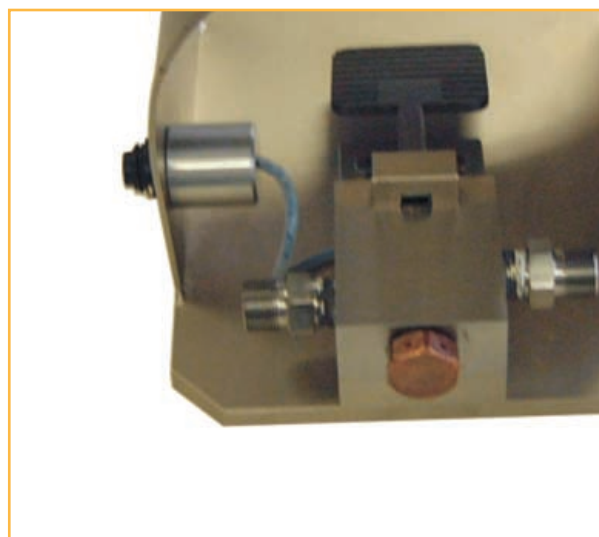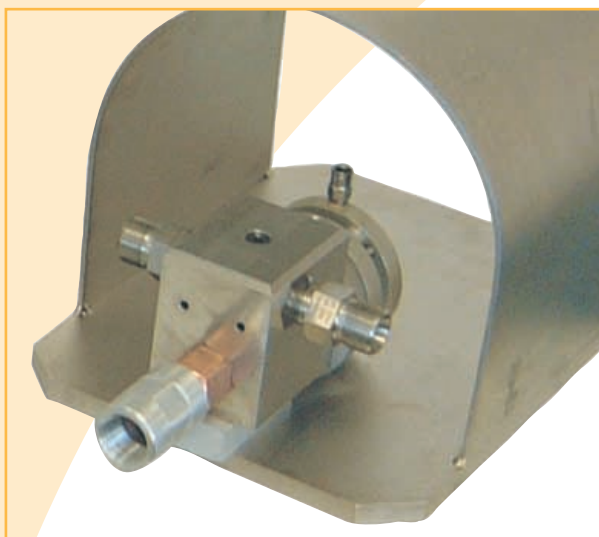

Part number	Description	Max. W.P.	Connection	Cartridge
700550	Dry Shut Foot Operated Control Gun	1000 Bar	1/2"NPT	700500
700650-BSP	Dump Style Foot Operated Control Gun	1000 Bar	1/2"BSP	700015A
700010	Dump Style Foot Operated Control Gun	1500 Bar	9/16"MP	700016A
700314	Dump Style Foot Operated Control Gun	2800 Bar	9/16"MP	700315
700011	Dump Style Foot Operated Control Gun	840 Bar	1"NPT	700044
700590	Dry Shut Foot Operated Control Gun	1500 Bar	9/16"MP	700600

For the above foot operated control guns we are able to supply a variety of adaptors (for example 1/2"BSP, M22x1,5 or M24x1,5) to suit your high-pressure hose.